





General purpose hose

H201	C-3	FC466	C-7	C
FC332	C-4	2583	C-7	
FC647	C-4	2580	C-8	
2556/2565	C-5	1503	C-9	
FC598	C-6	2651	C-10	
FC498	C-6			

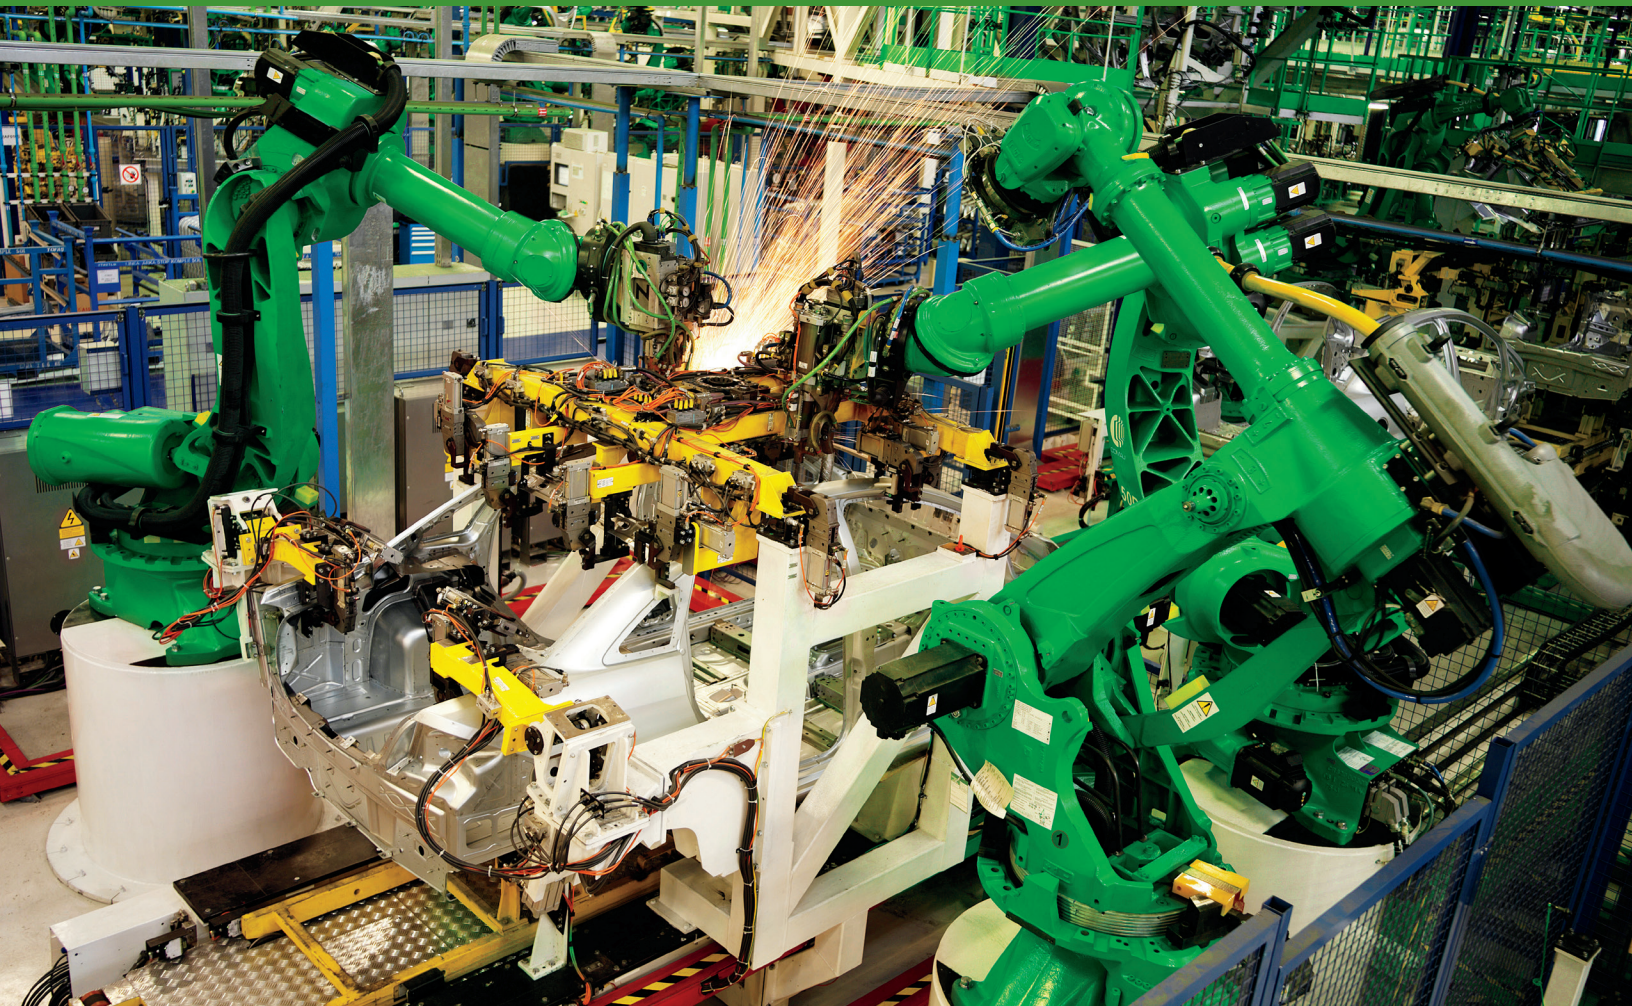

General purpose

C

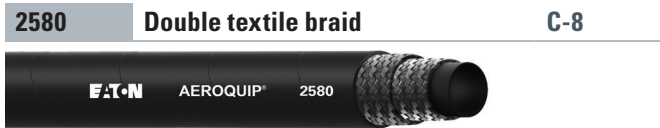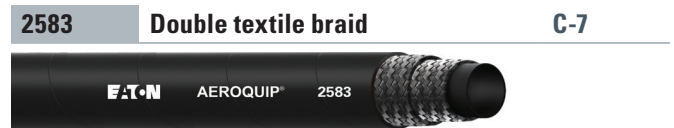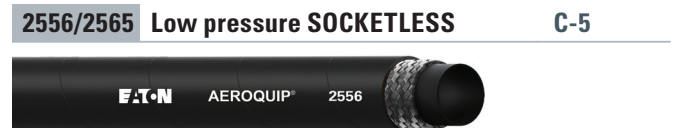

2556/2565

Low pressure **SOCKETLESS™**

Meets: SAE 20R2 Type 1, MIL-H-24136/3



# Part number	Hose I.D.			Hose O.D.		Maximum operating pressure		Minimum burst pressure		Minimum bend radius		Vacuum service		Weight	
	DN	mm	in	mm	in	bar	psi	bar	psi	mm	in	kPa	in/Hg	kg/m	lbs/ft
2556															
2556-4	6	6,4	0.25	12,4	0.49	25,0	360	99,0	1440	76,2	3.00	94,8	28	0,12	0.08
2556-6	10	9,7	0.38	15,7	0.62	21,0	300	84,0	1200	76,2	3.00	94,8	28	0,18	0.12
2556-8	13	12,7	0.50	19,1	0.75	21,0	300	84,0	1200	127,0	5.00	94,8	28	0,24	0.16
2556-10	16	16,0	0.63	23,1	0.91	17,0	250	70,0	1000	152,4	6.00	61,0	18	0,31	0.21
2556-12	19	19,1	0.75	26,2	1.03	17,0	250	70,0	1000	177,8	7.00	61,0	18	0,37	0.25
2565															
2565-4	6	6,4	0.25	12,7	0.50	21,0	300	87,0	1250	57,2	2.25	67,7	20	0,13	0.09
2565-6	10	9,7	0.38	16,0	0.63	17,0	250	70,0	1000	76,2	3.00	67,7	20	0,16	0.11
2565-8	13	12,7	0.50	19,8	0.78	14,0	200	52,0	750	95,3	3.75	33,9	10	0,25	0.17
2565-10	16	16,0	0.63	24,6	0.97	12,0	175	49,0	700	120,7	4.75	33,9	10	0,42	0.28
2565-12	19	19,1	0.75	27,7	1.09	8,5	125	35,0	500	139,7	5.50	33,9	10	0,45	0.30

Construction

- Tube:** Synthetic rubber
- Reinforcement:** Textile braid
- Cover:** Synthetic rubber

Operating parameters

- 2556:** -40°C to +100°C (-40°F to +212°F)
Water not to exceed +66°C (+150°F)
Air not to exceed +160°C (+71°F)
- 2565:** -54°C to +121°C (-65°F to +250°F)
Water not to exceed +66°C (+150°F)
Air not to exceed +74°C (+165°F)

Application

- For gasoline, fuel and lubricating oils, air and water
- Not recommended for hydraulic impulse applications and not approved for air brake applications
- 2565 is a low-temperature synthetic rubber covered MILDTL-13444 Type 1, Class A hose

For more information on agency listings, specific fluid applications and high temperature ratings see section A.

Fitting reference	Page
Reusable SOCKETLESS	I-48-53