



DRG. No.
BLD2856 INST

USED ON BL/

THIRD ANGLE PROJECTION

THIS DESIGN IS THE PROPERTY OF BROWNELL LTD AND MAY NOT BE REPRODUCED WITHOUT THEIR PRIOR WRITTEN PERMISSION

DO NOT SCALE - ASK

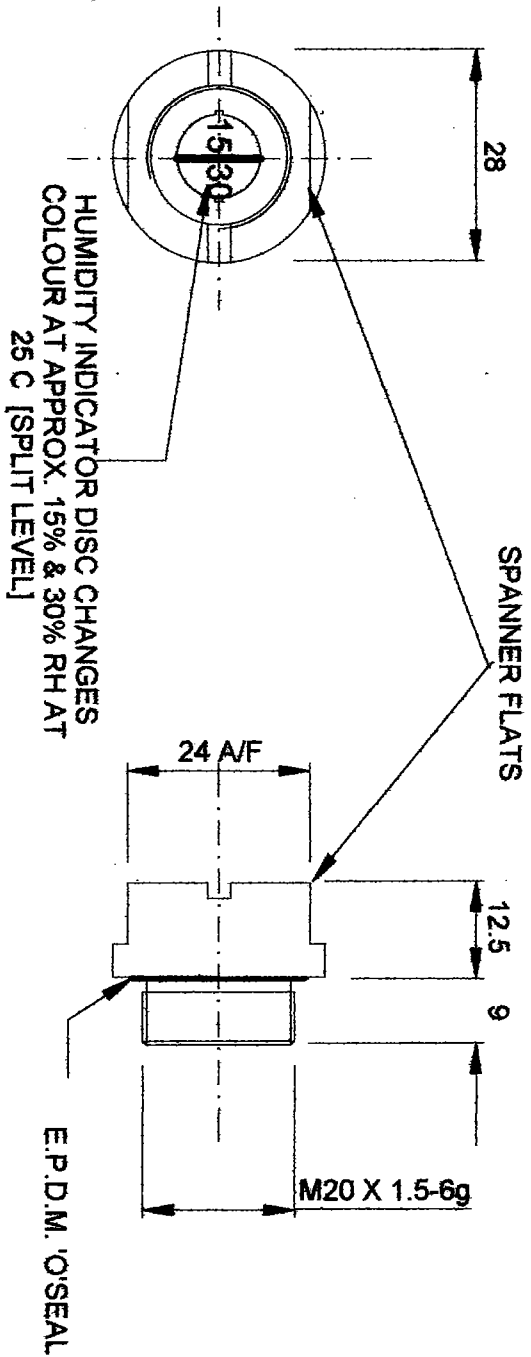

NOT TO EXCEED 0.8um CLA
PANEL MOUNTING DETAIL

NOTES:

INTERNAL THREAD M16 X 1.0 - 6H
TO FIT VARIOUS MOLECULAR SIEVES FILLED
DESICCANT CONTAINERS DEHUMIDIFIER

THE ITEM IS PACKAGED FOR A 5 YEAR
TEMPERATE OR 3 YEAR TROPICAL
SHELF LIFE IN MFL EITHER INDIVIDUALLY
OR ENVELOPES HOLDING 3.

| | | | |
|----------------------|------|---|---------|
| REDRAWN | 5882 | 9 | 11-1-02 |
| LETTER N° DELETED | 5381 | 8 | 18-1-89 |
| TABLE ALTERED | 3271 | 7 | 8-4-87 |
| 7 DELETED | 2757 | 6 | 21-6-84 |
| | 2462 | 5 | 8-3-83 |

MATERIAL

ALUMINIUM ALLOY

PROTECTIVE TREATMENT

ANODISE & DYE BLACK

TOLERANCES

EST. WT.
DIMNS. IN MM.
SCALE

BROWNELL LTD. LONDON, NW10

TITLE

INDICATOR HUMIDITY PLUG
STYLE IHP4M - DEF STAN 66-14
6685-99-658-1950

CHANGE

DRAWN NGH MOD. N° ISSUE DATE

DRAWING No.

CHECKED GGH

BLD2856 INST